boneIO Black

boneIO Black — from the electrical cabinet to a working home in a few steps, without programming.

Copy Markdown Open

Welcome to the boneIO Black documentation

boneIO Black is a DIN-rail controller that **works as soon as it is powered** — out of the box its inputs drive its outputs (for example IN01 → OUT01), even without a network. Everything else you set up in a web browser: no programming and no editing files.

Moving to version 1.6? Start with What's new in 1.6 — what changes for you, and what to do before and after the update.

From the box to a working controller

Our website uses cookies

Like most websites, we use cookies to make our site work as expected, improve your experience on the site, analyze site usage, and assist in our marketing efforts.

By selecting "Accept all cookies", you consent to the storage of all cookie categories on your device. If you want to accept or reject some cookie categories, click "Cookie preferences".

To learn more, visit our Privacy Policy

Reject all Cookie preferences


1. **Mount and power it.** DIN rail, 24 V DC — preferably from a UPS or buffered power supply. Hardware installation: 32x10A · Cover · Cover Mix
2. **Connect it to the network and open the panel.** An Ethernet cable, then `https://<controller IP>:8443` in a browser — Connect to your boneIO.
3. **Go through the short wizard.** An administrator account and a few questions about the controller — First-time setup.

4. **Name your inputs and outputs, assign rooms.** In the panel's forms — Naming inputs, Areas.
5. **Connect Home Assistant.** The controller announces its entities over MQTT — they appear in Home Assistant with no manual setup, grouped by room — Home Assistant connection.

From there you can add actions to buttons, covers, schedules and everything described in boneIO Black App.


Our website uses cookies

Like most websites, we use cookies to make our site work as expected, improve your experience on the site, analyze site usage, and assist in our marketing efforts.
By selecting "Accept all cookies", you consent to the storage of all cookie categories on your device. If you want to accept or reject some cookie categories, click "Cookie preferences".
To learn more, visit our Privacy Policy

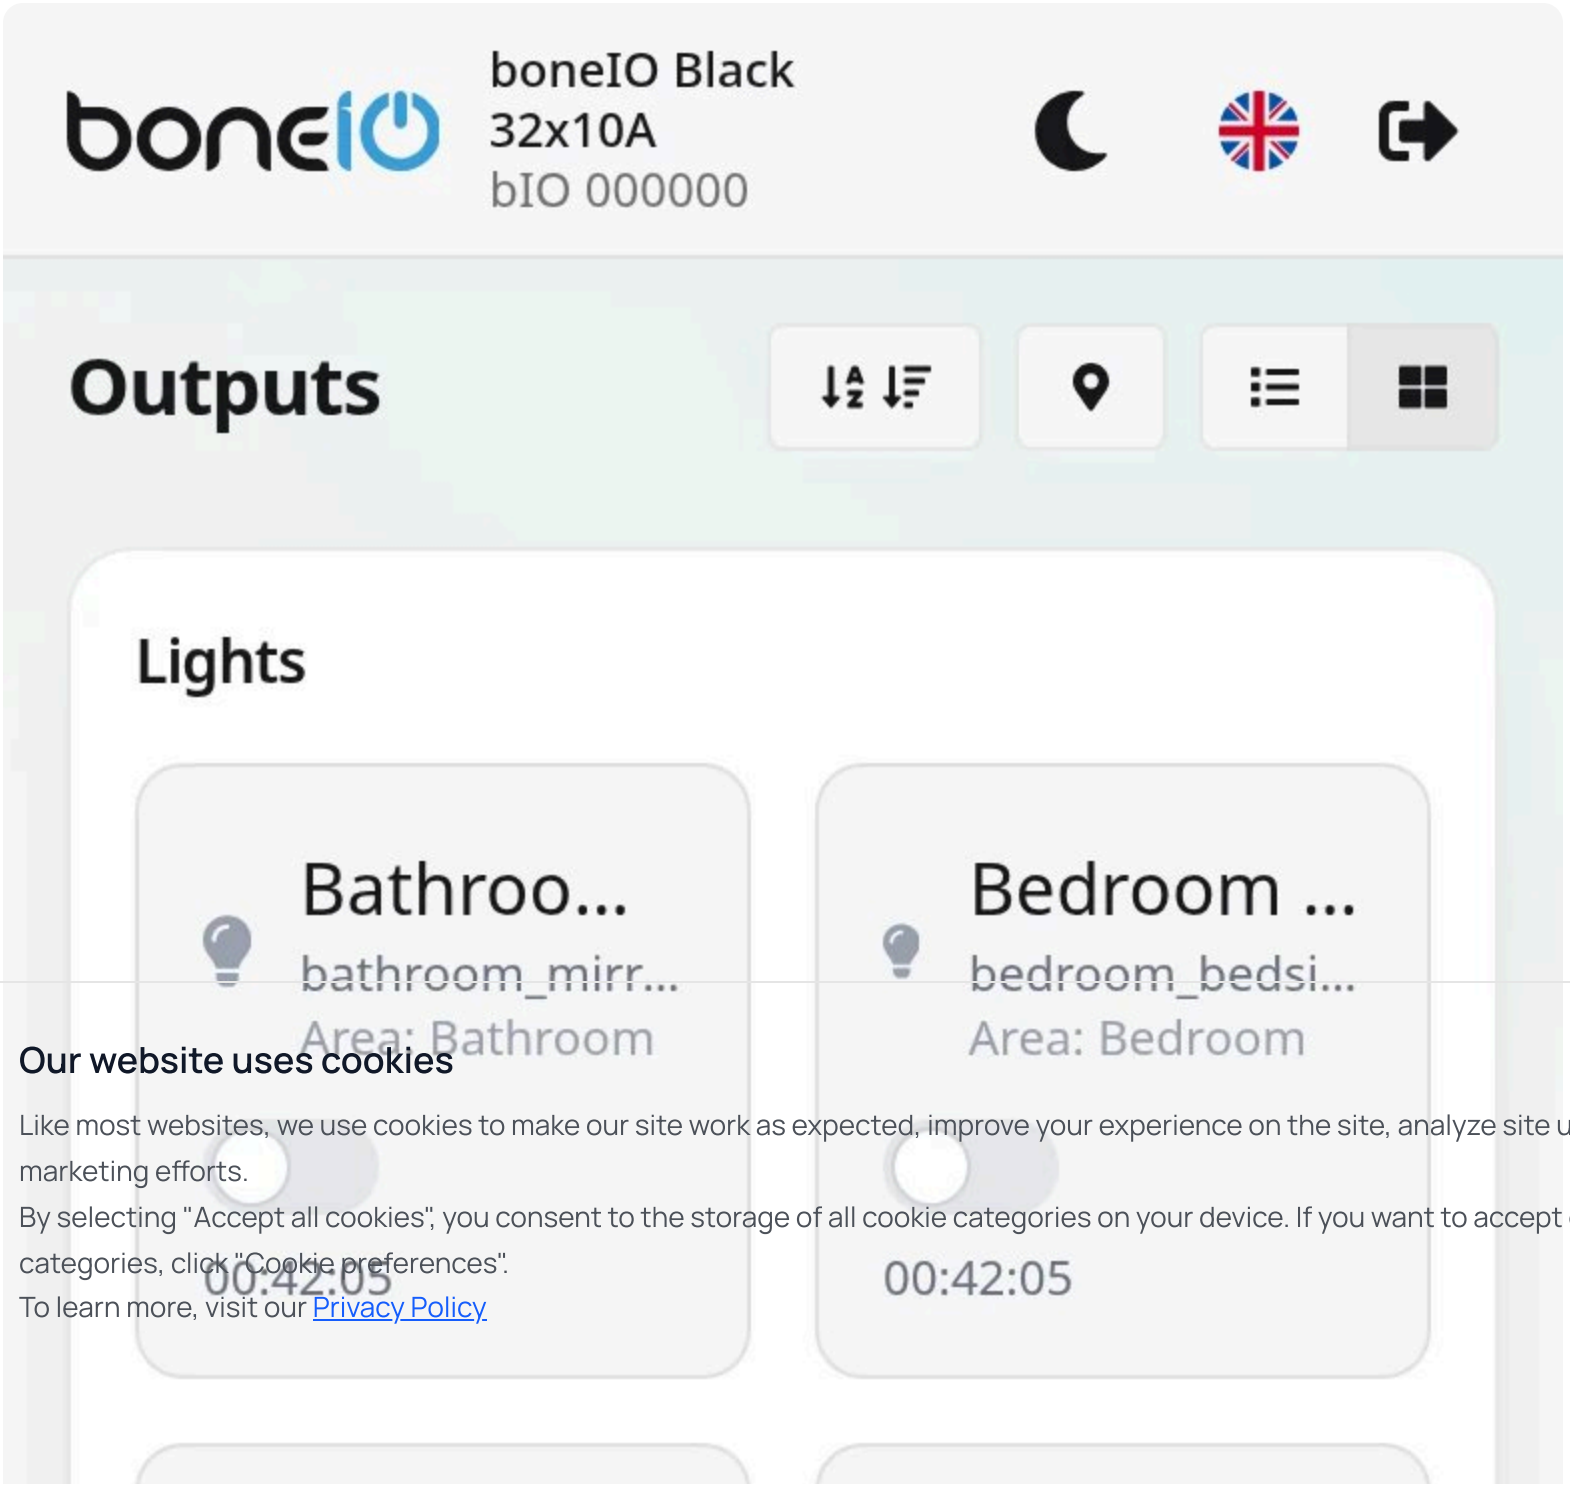

Our website uses cookies

Like most websites, we use cookies to make our site work as expected, improve your experience on the site, analyze site usage, and assist in our marketing efforts.
By selecting "Accept all cookies", you consent to the storage of all cookie categories on your device. If you want to accept or reject some cookie categories, click "Cookie preferences".
To learn more, visit our Privacy Policy

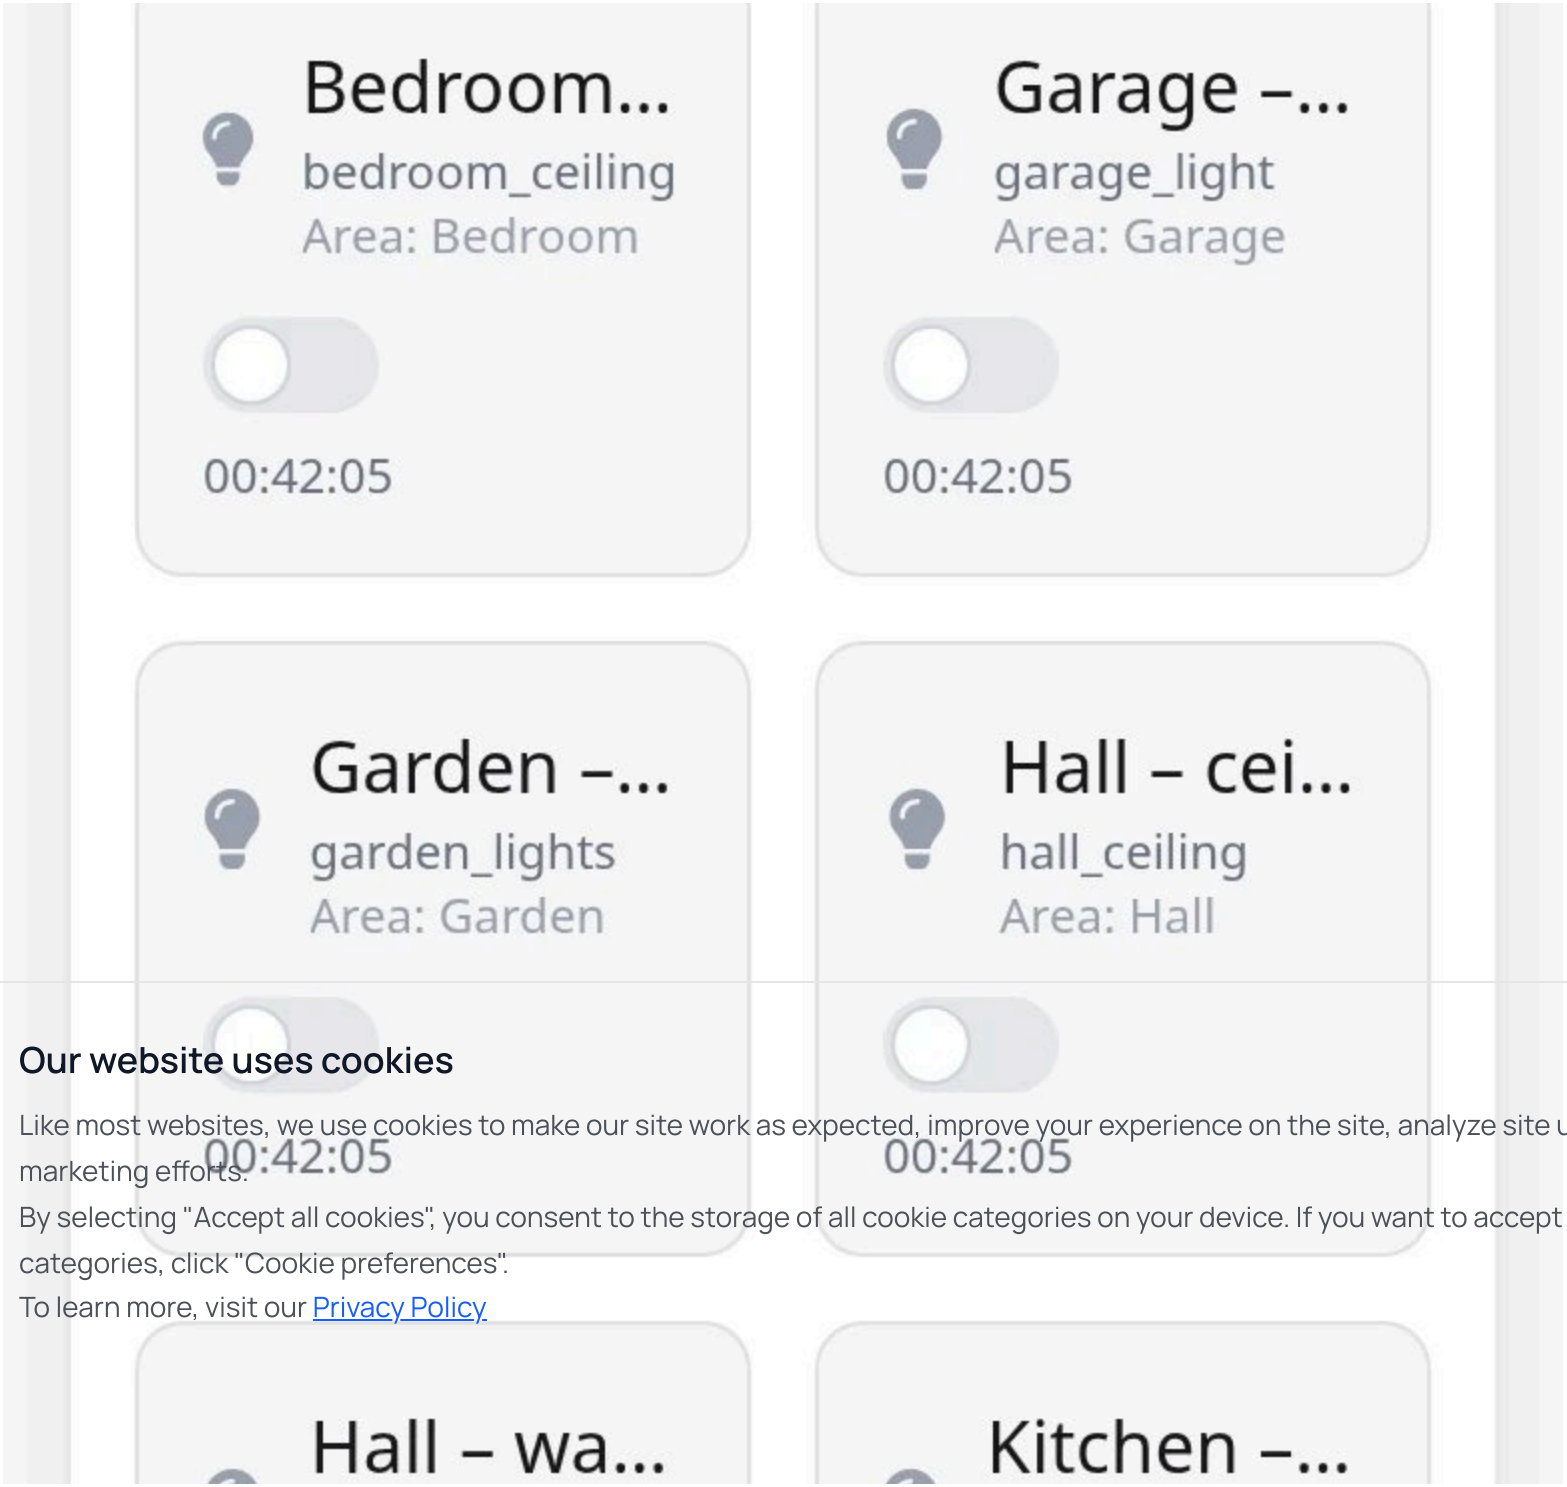


Our website uses cookies

Like most websites, we use cookies to make our site work as expected, improve your experience on the site, analyze site usage, and assist in our marketing efforts.

By selecting "Accept all cookies", you consent to the storage of all cookie categories on your device. If you want to accept or reject some cookie categories, click "Cookie preferences".

To learn more, visit our Privacy Policy

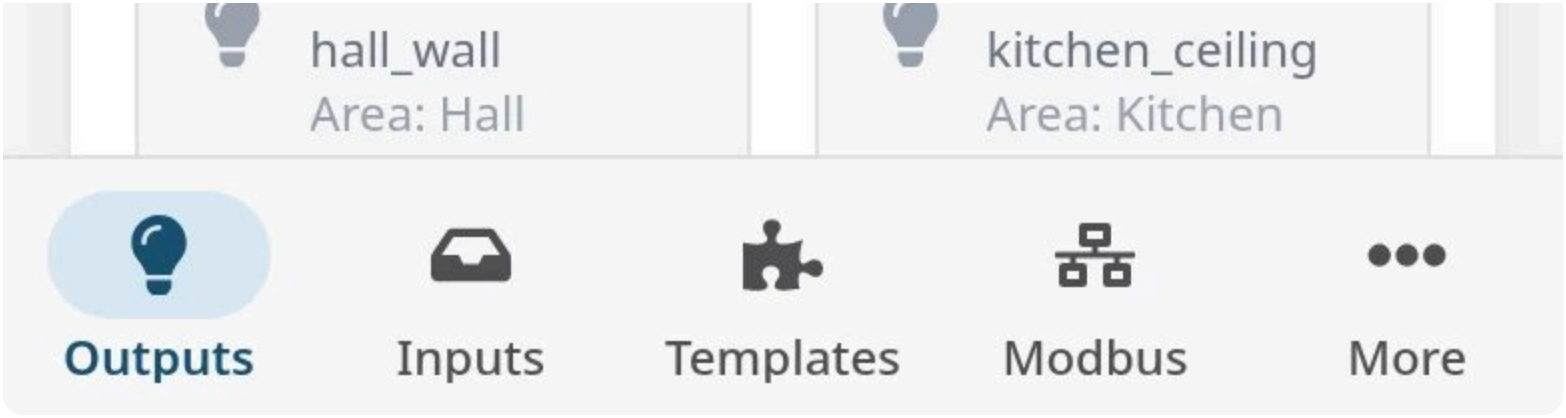

Choose your controller

Inputs and buses are the same on every boneIO Black controller; the outputs and how they are wired differ.

boneIO Black 32x10A
49 digital inputs and 32 relay outputs — whole-home automation.

boneIO Black Cover
A dedicated controller for up to 16 blinds or shutters.

boneIO Black Cover Mix
8 blinds and 16 lighting circuits.

Have a boneIO Black 24x10A? It is discontinued; its guide stays available.

Our website uses cookies

Like most websites, we use cookies to make our site work as expected, improve your experience on the site, analyze site usage, and assist in our marketing efforts.

By selecting "Accept all cookies" you consent to the storage of all cookie categories on your device. If you want to accept or reject some cookie categories, click "Cookie preferences".

To learn more, visit our Privacy Policy

What the app can do

The boneIO app is the same on every boneIO Black controller — only the factory configuration differs.

Lights, sockets, covers

Buttons and sensors

Outputs, output groups, time-based covers and venetian blinds with tilt, gates.

Single, double and long press, reed switches, motion sensors, temperature, Modbus.

On its own, on time

Schedules at a clock time or with the sun, virtual switches, presence simulation.

More than relays

Alarm, irrigation, thermostat, energy counters, Node-RED, MQTT and Loxone.

Secure from the first start

The panel over HTTPS, accounts with roles, no default passwords, and a page that tells you what is left to fix.

Looks after itself

boneIO and whole-system updates from the panel, backups, diagnostics, recovery mode.

Version 1.6 is our work of adapting boneIO Black towards the EU Cyber Resilience Act (CRA) — details in the release notes.

What's new in 1.6 >

Version 1.6 in plain words — what you get, what you need to do after the update, and where things moved.

Our website uses cookies

Like most websites, we use cookies to make our site work as expected, improve your experience on the site, analyze site usage, and assist in our marketing efforts.
By selecting "Accept all cookies", you consent to the storage of all cookie categories on your device. If you want to accept or reject some cookie categories, click "Cookie preferences".
To learn more, visit our Privacy Policy